

MARSTEK

Power Anywhere & Anytime

SATURN-M MICRO INVERTER



Powerful Features

800W/1000W On-grid
2 MPPT for 1kW PV Input

2000W On-grid
4 MPPT for 2kW PV Input



High Efficiency

99.8% MPPT Efficiency
96.5% Peak Efficiency




High Safety

IP67 Waterproof
10 Years Warranty



Easy Installation

MC4 Plug & Play

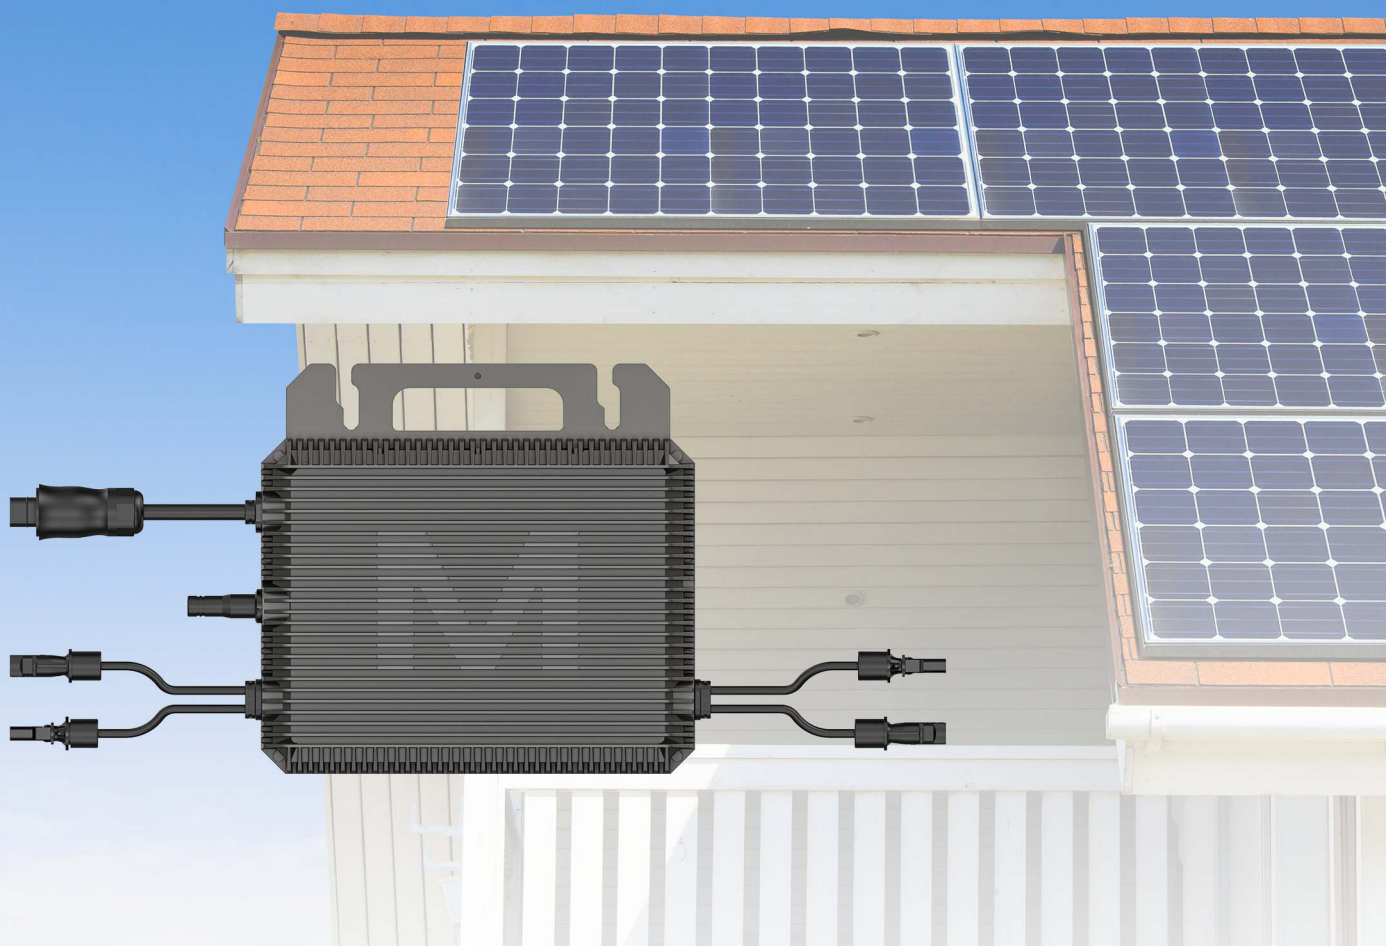

Marstek Energy Co., Limited

Add: BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen, Guangdong, China

Tel: 86-755-28398778


Email: market@marstekenergy.com

Web: www.marstekenergy.com



Product Manual

SPECIFICATIONS

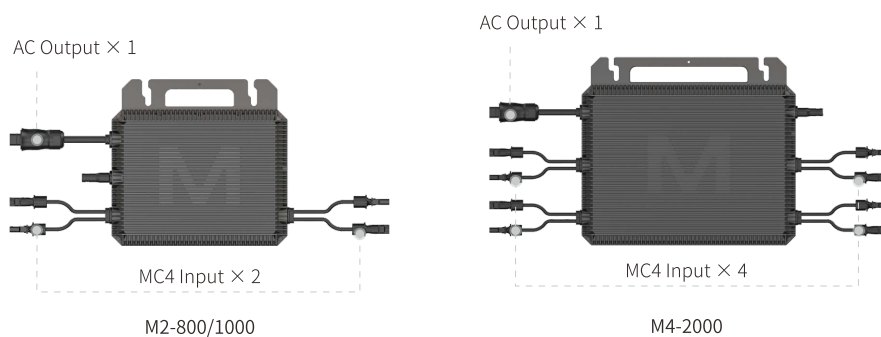

Model	M2-800	M2-1000	M4-2000
DC Input			
Max. Input Voltage	60V		
PV Typical Input Power(single-phase)	320W~540W+	400W~670W+	400W~670W+
Range of Input Operating Voltage	16V~60V		
Range of Mppt Voltage	25V~55V		
Start-up Voltage	22V		
Max. Input Current(single-phase)	12.5A	14.5A	14.5A
Max. Short Current(single-phase)	20 A		
MPPT No.	2	2	4
MPPT Efficiency	99.80%		
AC Output			
Max. Output Power	800W	1000W	2000W
Nominal Output Voltage(AC)	230V		
Output Voltage Range	180V~275V		
Nominal Output Frequency & Range	50Hz / 45~55Hz, 60Hz / 55~65Hz		
Max. Continuous Output Current(AC)	3.48A	4.35A	8.7A
Max. Efficiency	96.5%		
Output Power Factor	>0.99(Default)		
THD	<3%		
General			
Night Power Consumption	<50mW		
Ingress Protection	IP67		
Over Voltage category	PV: II , Mains:III		
Inverter Topology	Isolated		
Operating Ambient Temp.	-40°C~65 °C		
Cooling Strategy	Natural Convection		
Protective Class	I		
Supported Communication Interface	4G / WIFI		
Size	551×265×37mm	551×265×37mm	655×311×37mm
Weight	3.85kg	3.85kg	6.4kg
Monitoring Platform	MARSTEK Energy		
Maintenance	10 Year		
Additional Data			
On-grid Connection Standard	VDE 4150/0124,TOR R25,NF EN 50549,C10/110,PTPIREE,CEI0-21,UNE 217001,UNE 217002,G98,A2LA,DAKKS		
Regulatory/EMC	IEC/EN 62109-1/-2,IEC/EN 61000-6-1/-2/-3/-4,EN 301 489-1/17/52,EN 62920,IEC/EN 61000-3-2/-3, EN 50665,EN 300 328,EN 50549-1		